


Fig 1B

Fig. 1c

80

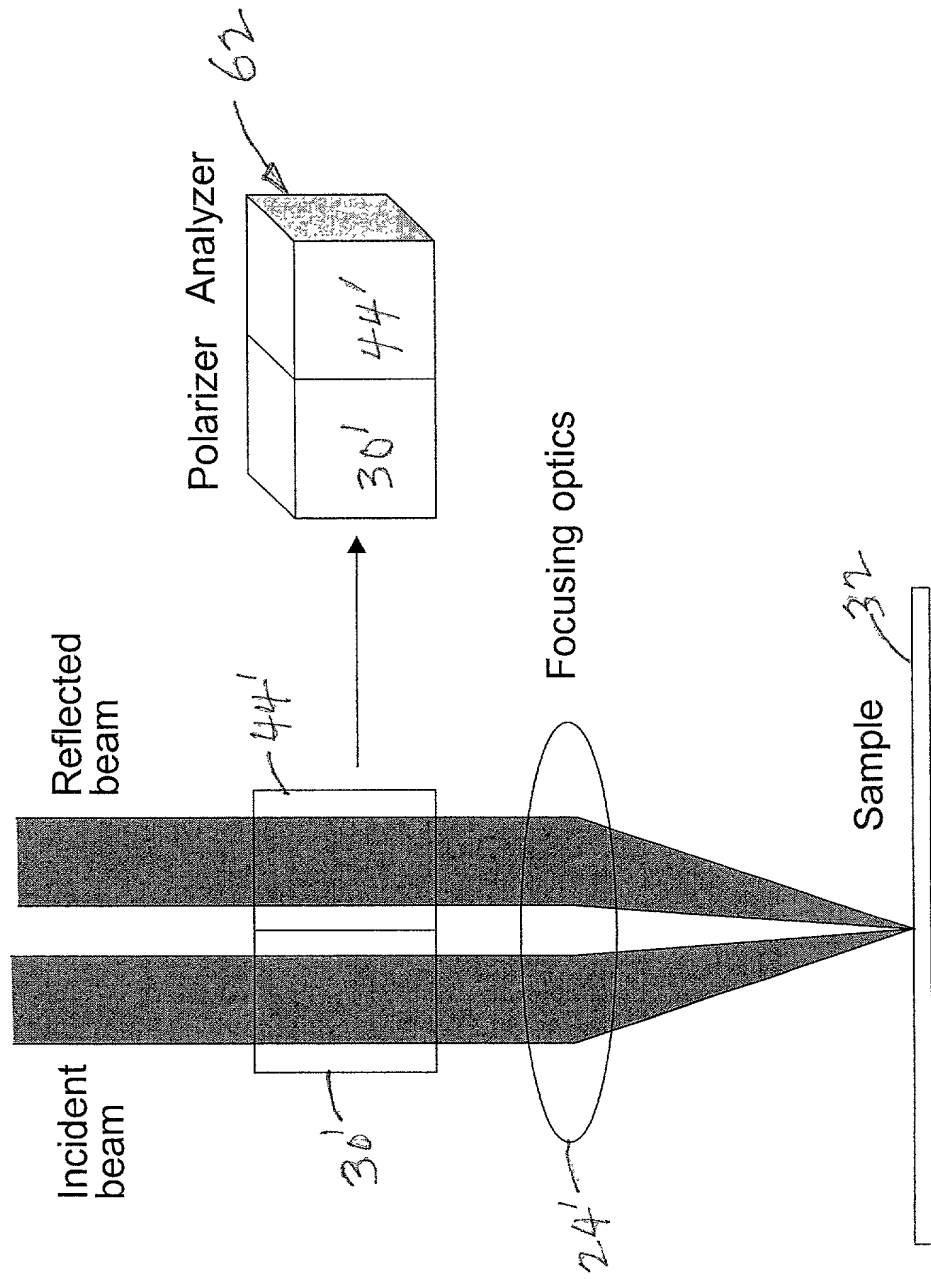

100 X

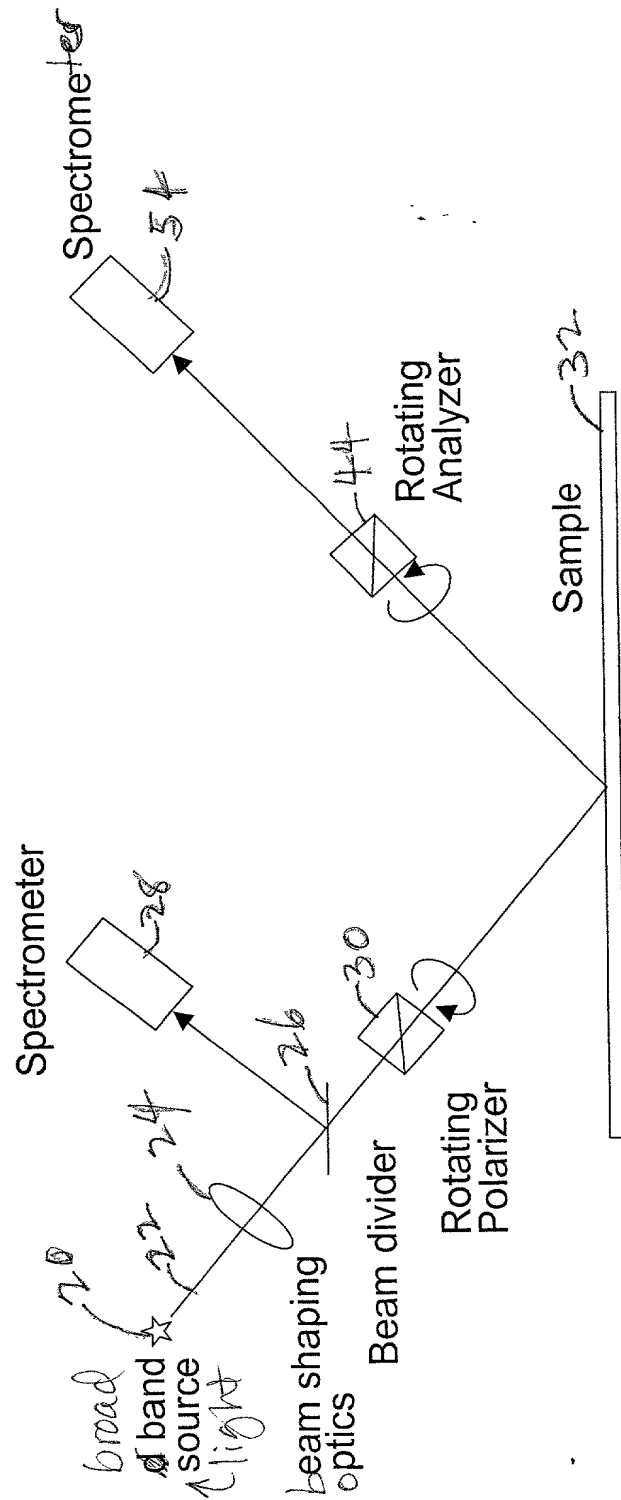


Figure 2. Ellipsometer or reflectometer with rotating polarizer and analyzer

Flg. 3

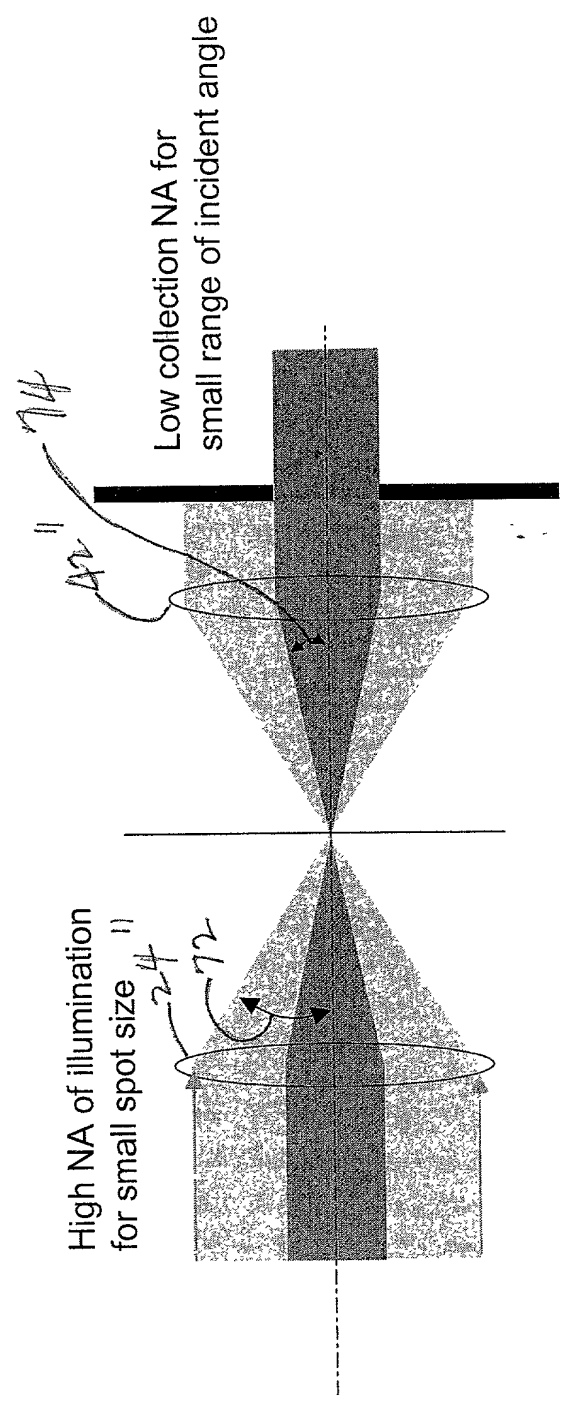


Figure 2a: Asymmetric NA for illumination and collection. Shown in transmission mode, can be applied to reflection mode.

Fig. 4A



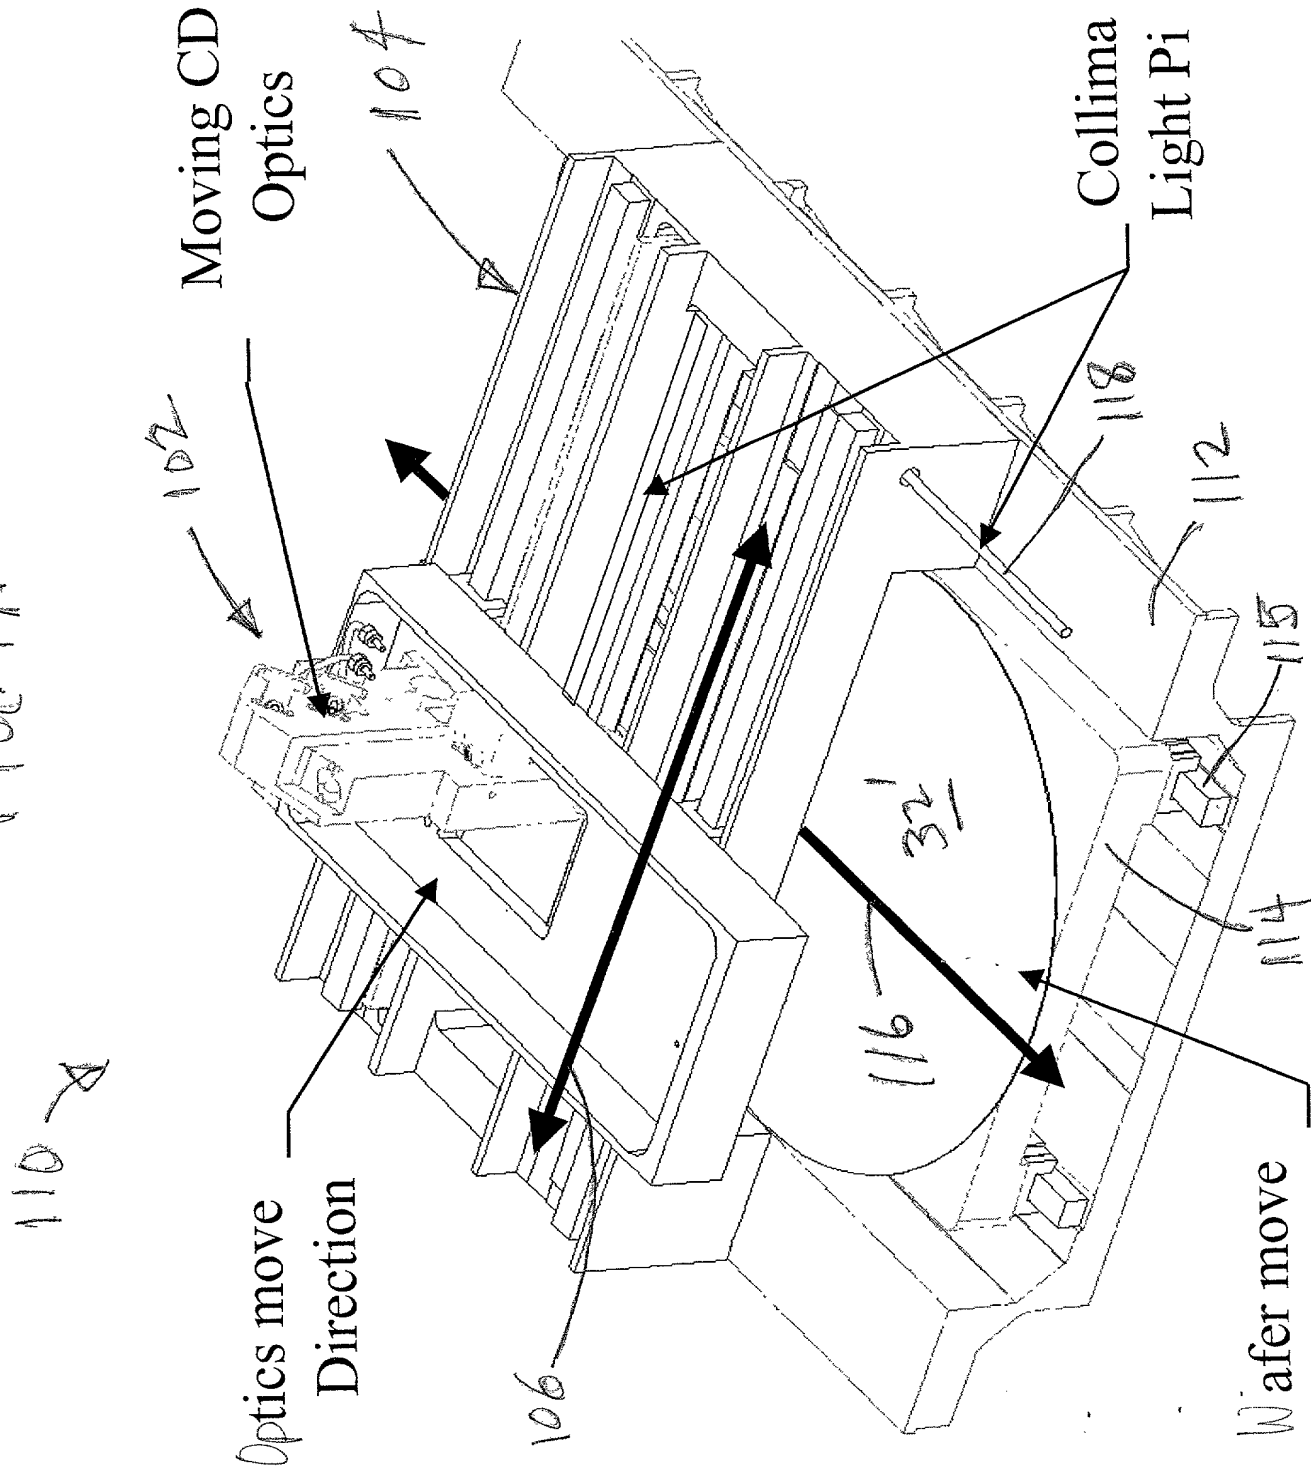


Fig. 4B

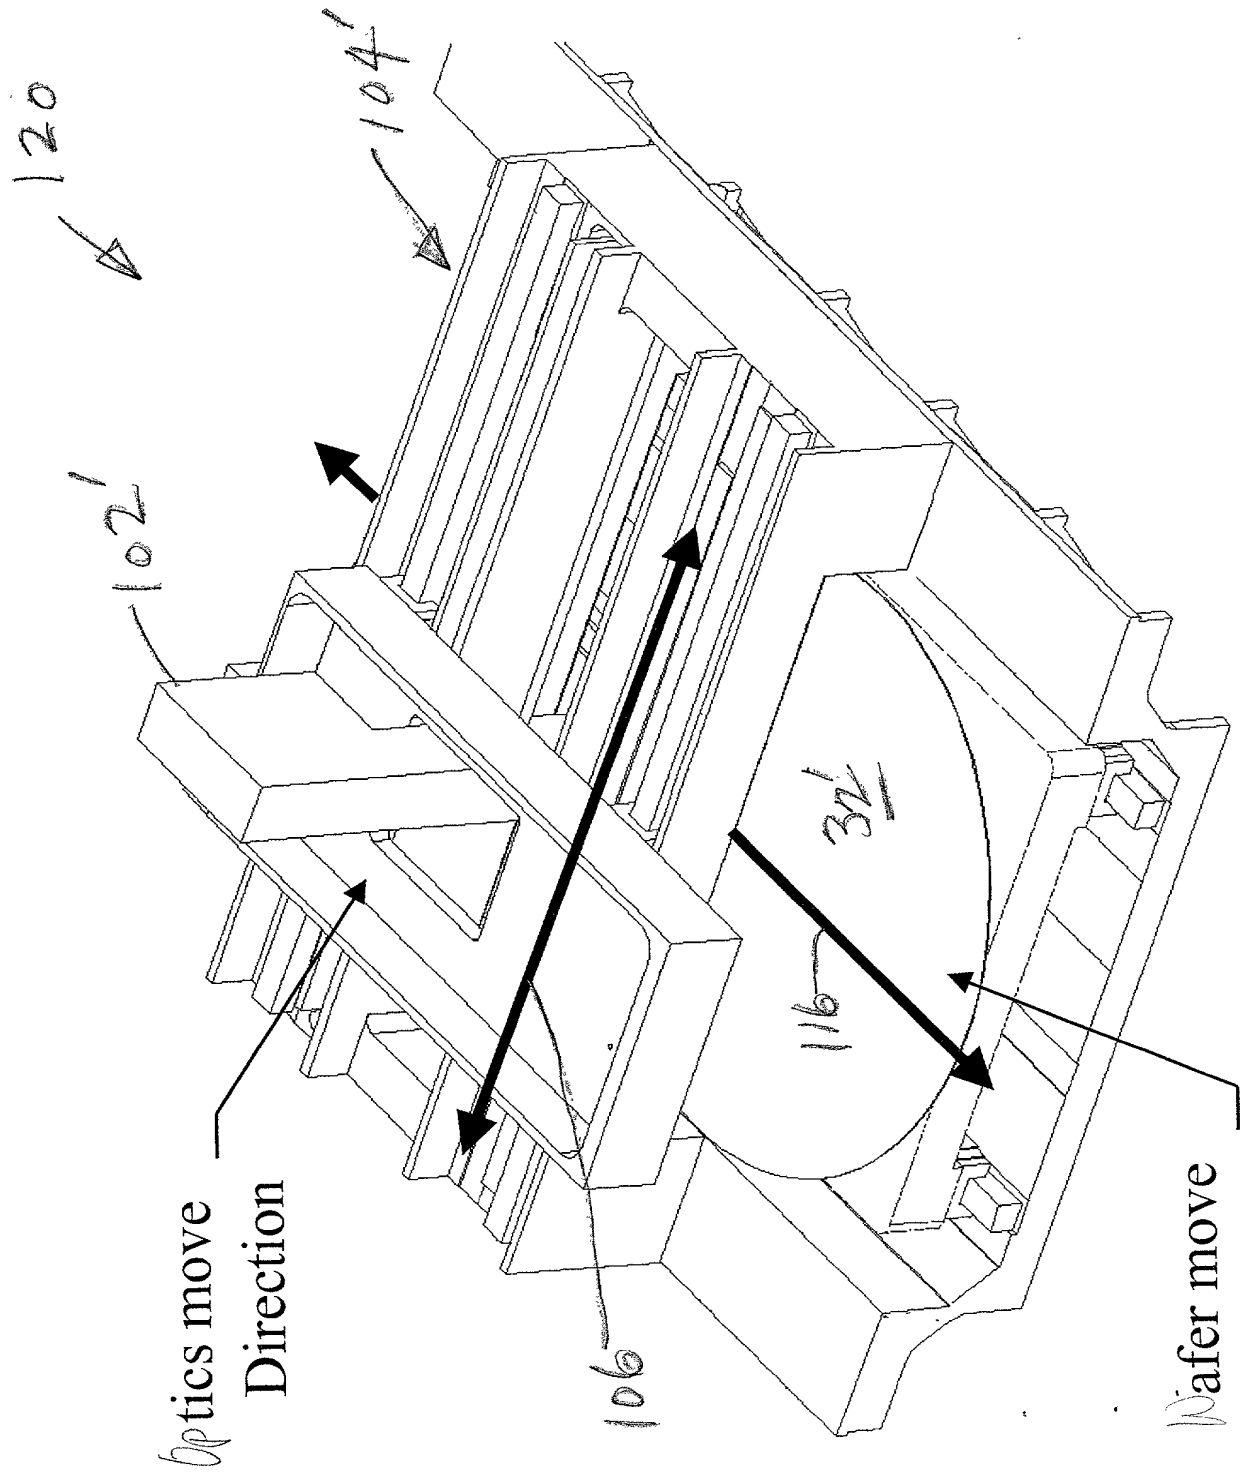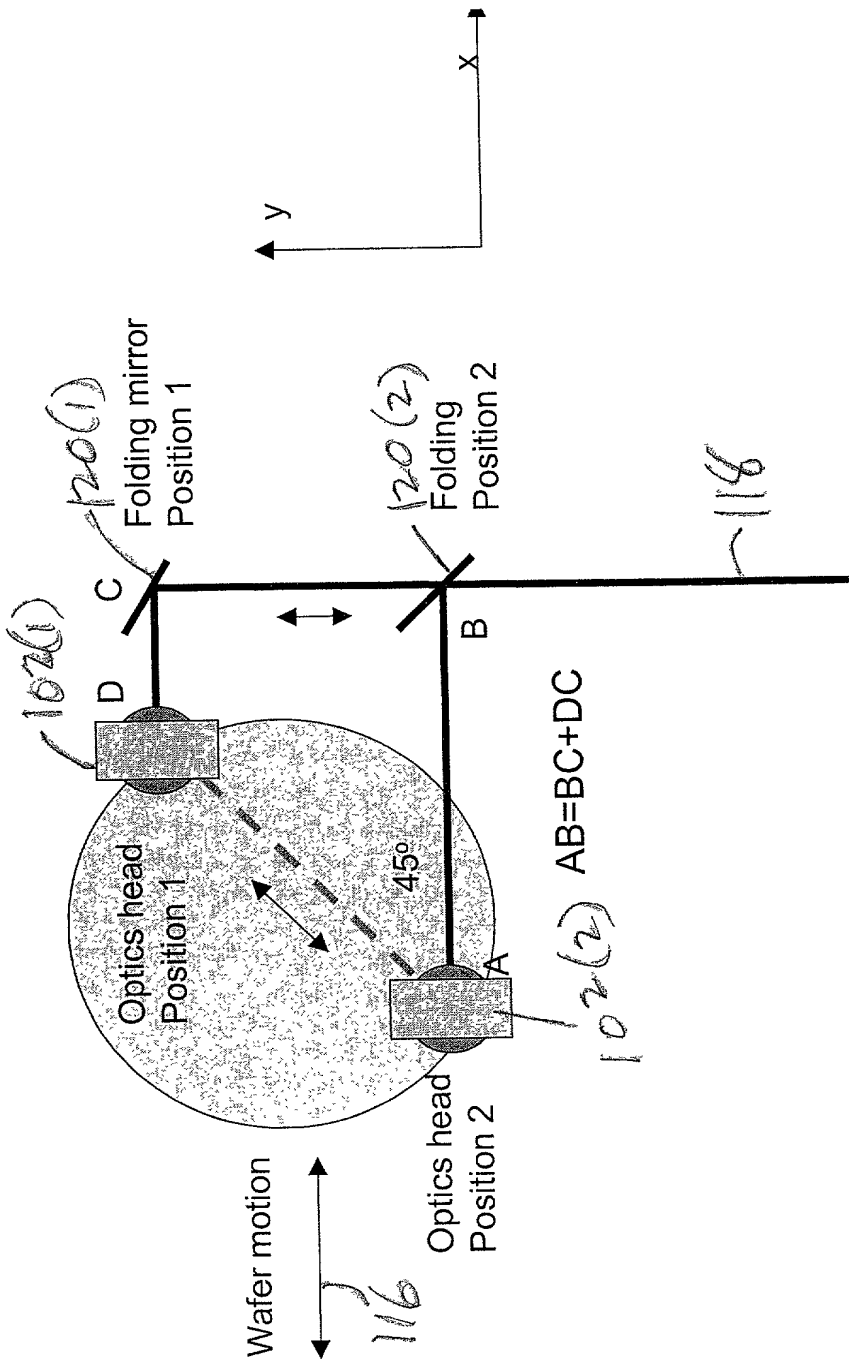

Flt. 4C



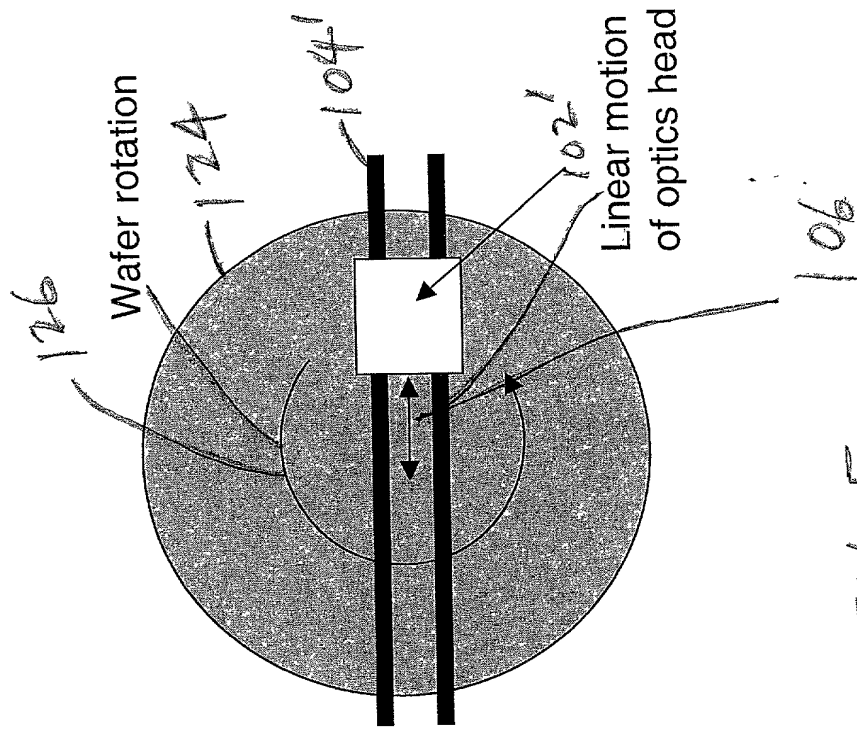


FIG. 5

000221 6202160

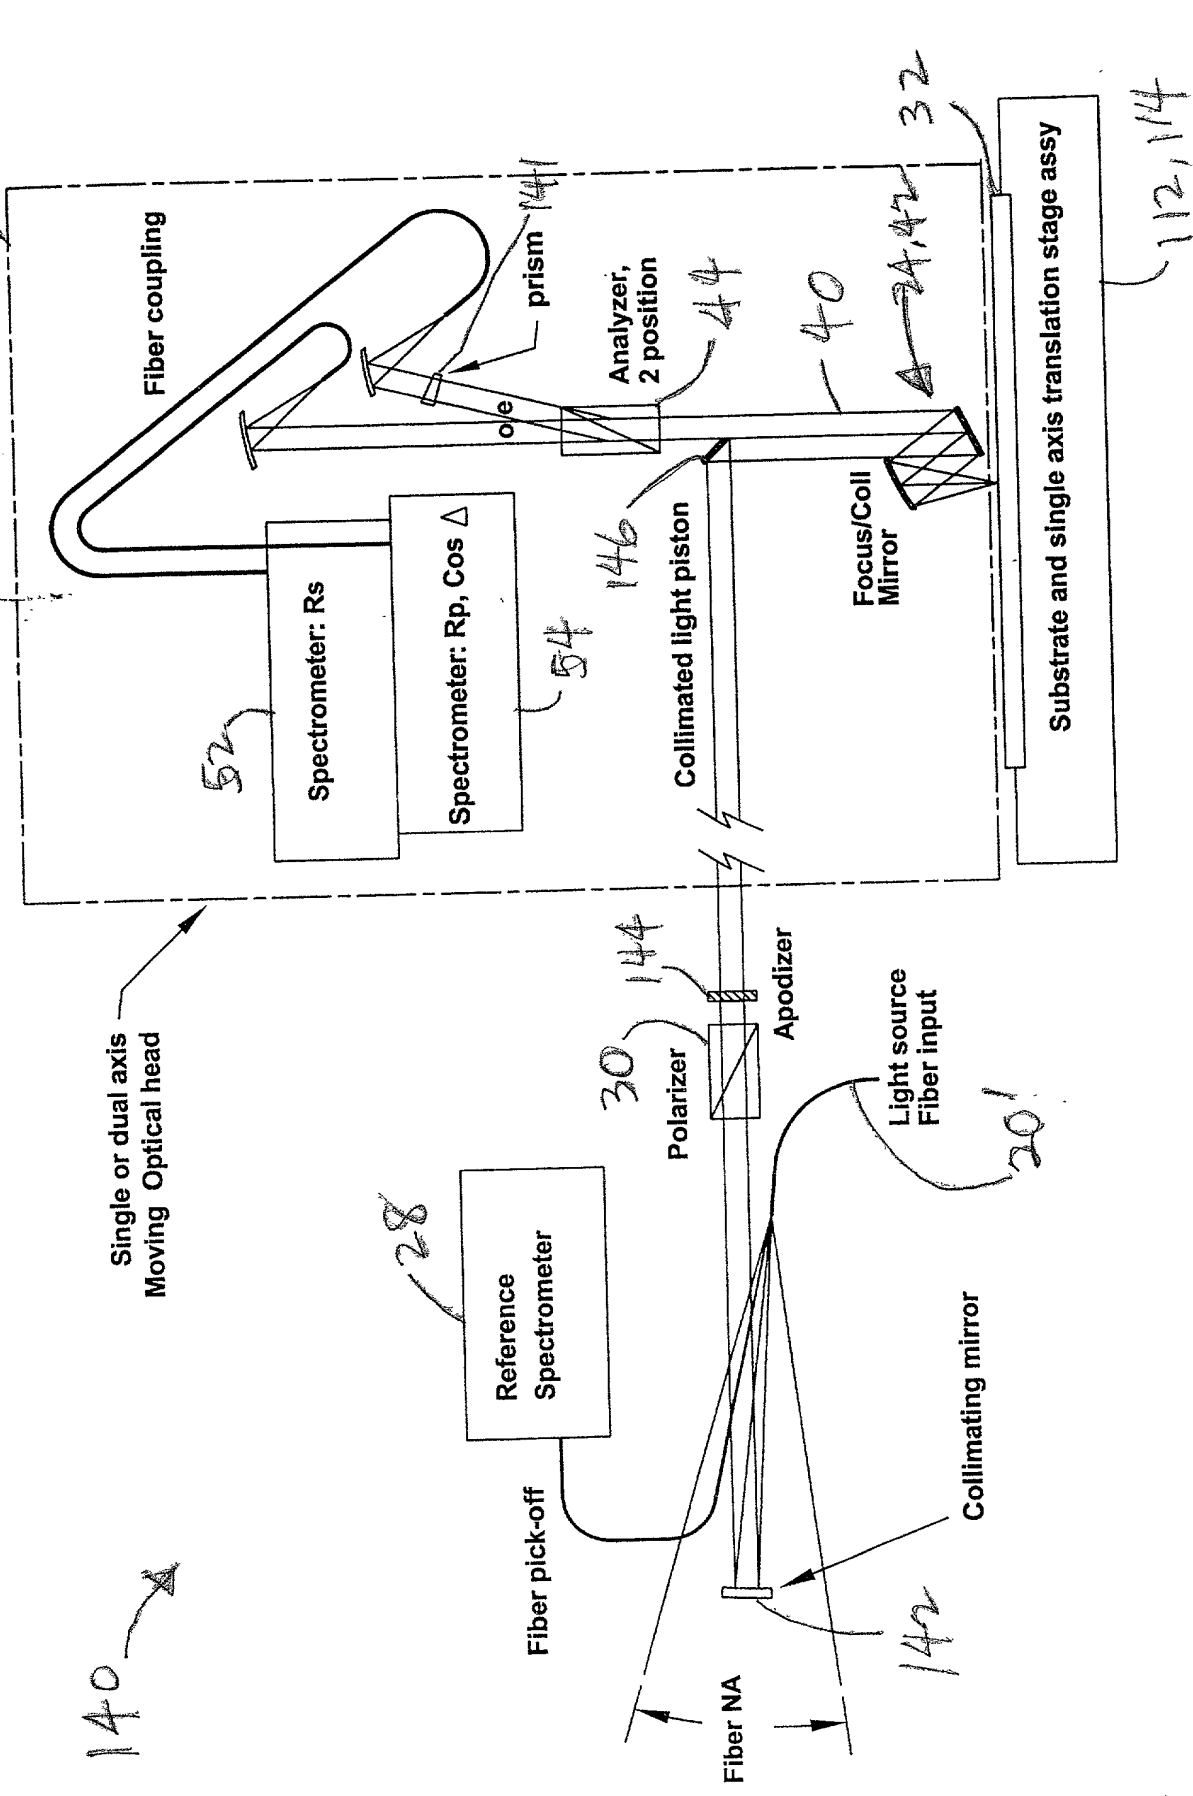


Fig. 6

000221 62021/60

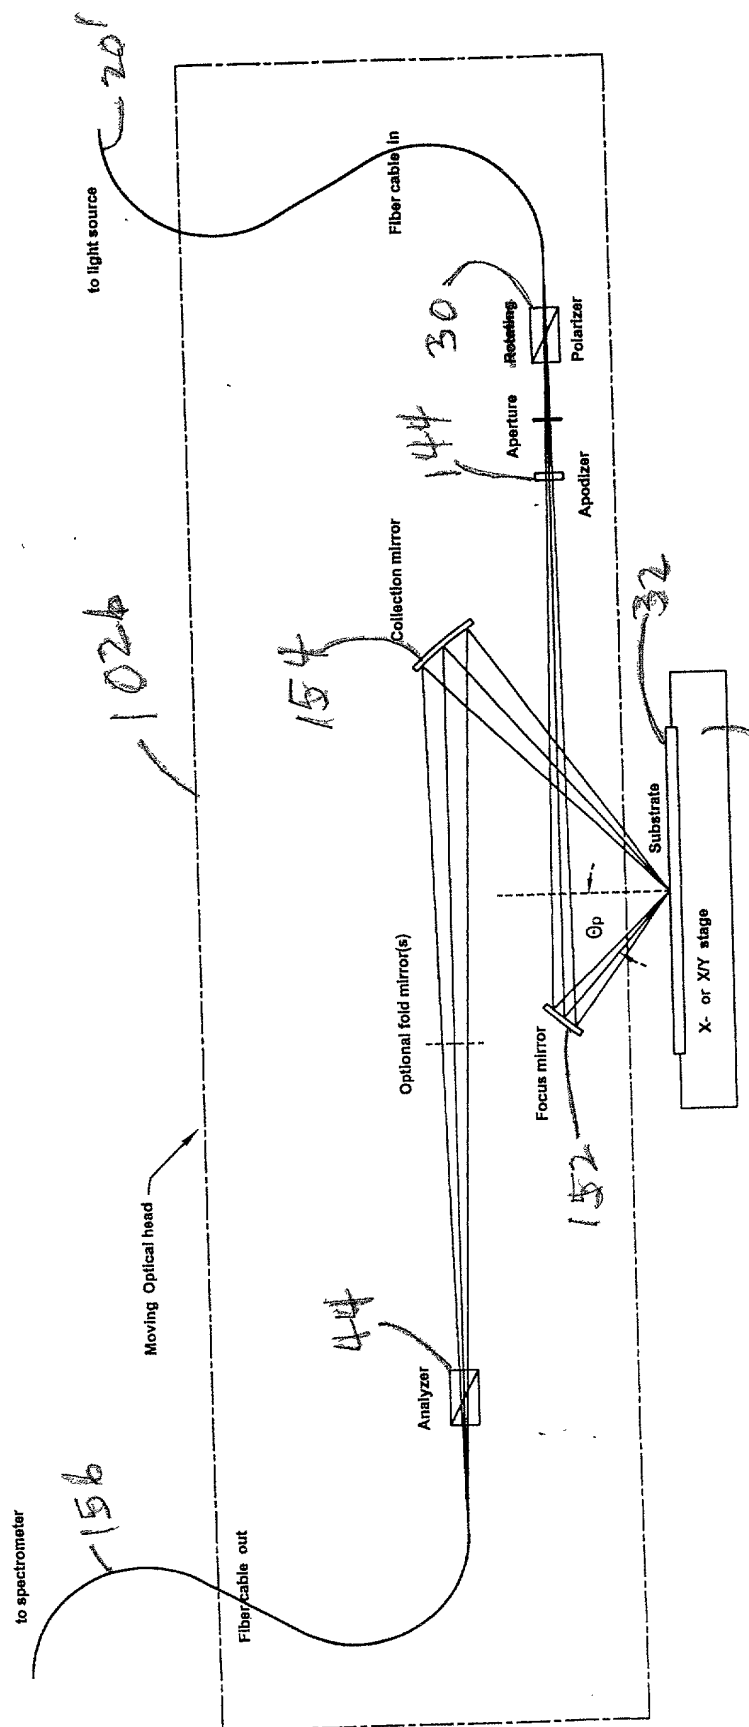


Fig. 7

148

000227" 62024/60 1021

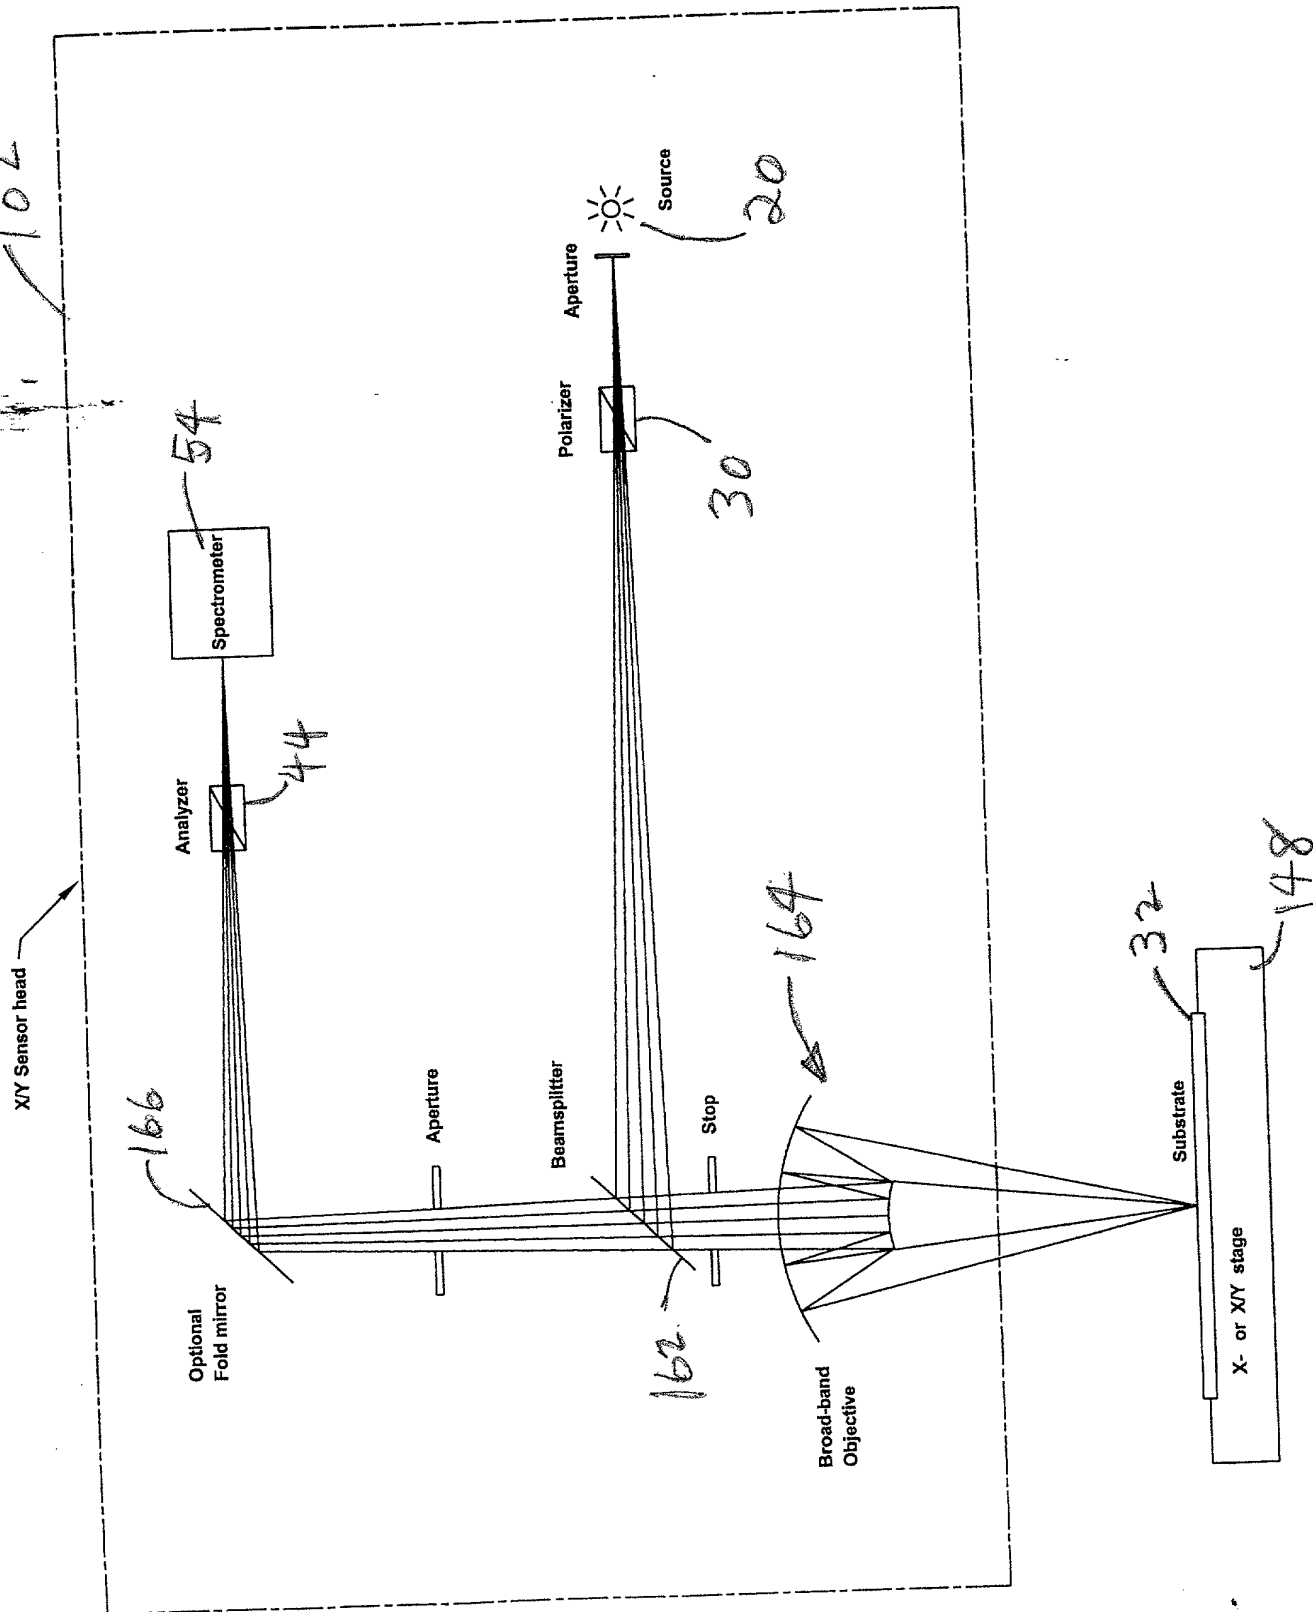
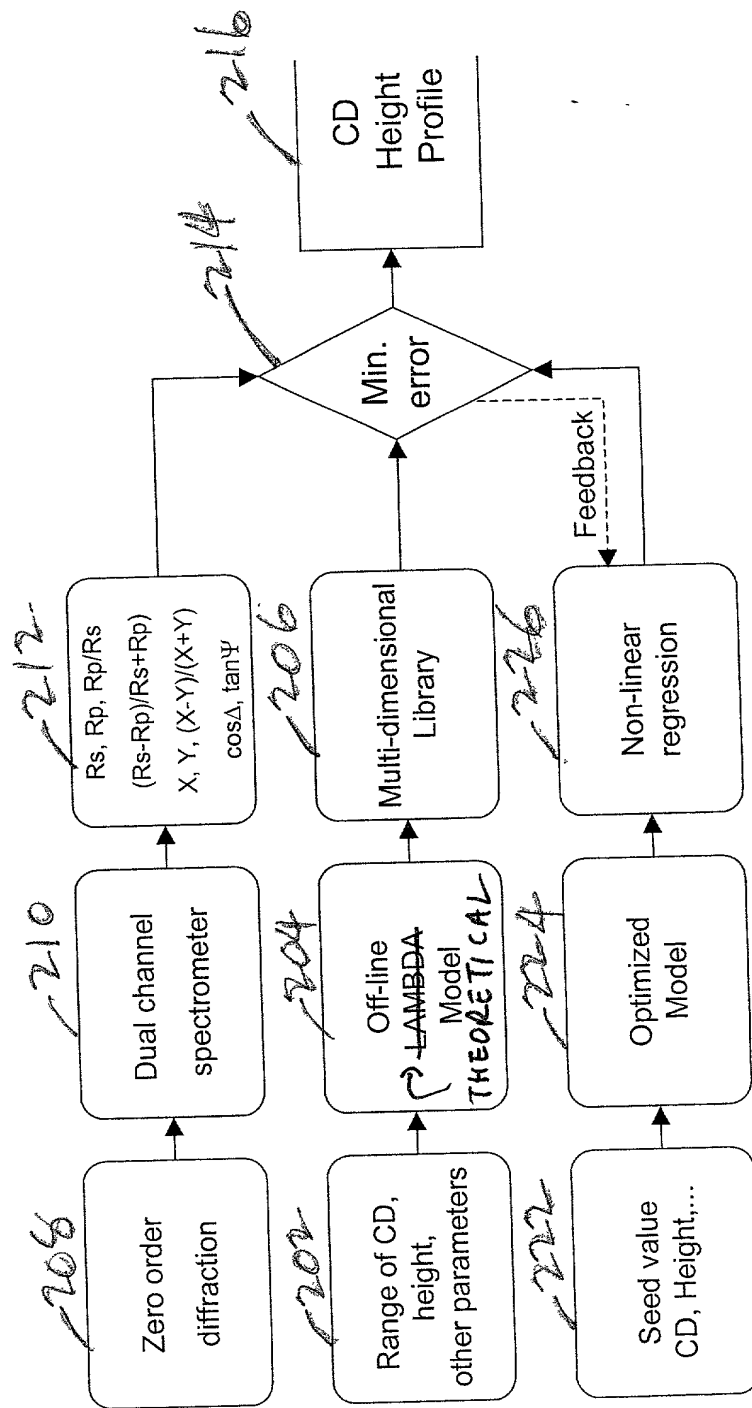


Fig. 8

FIG. 9



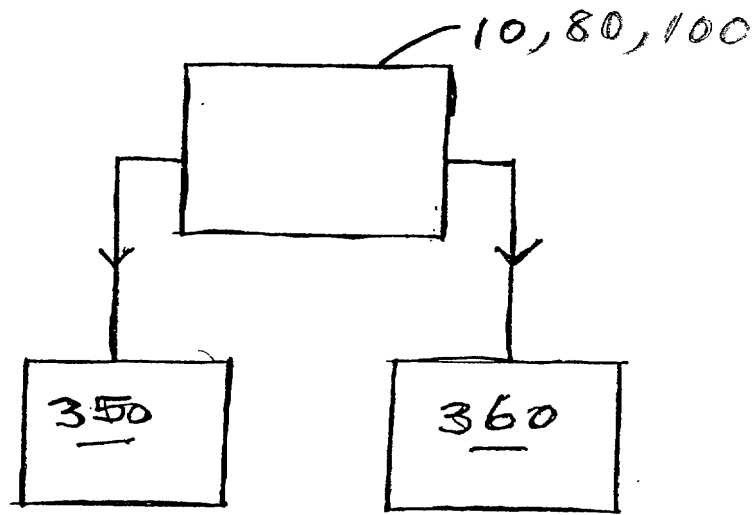


FIG. ~~10~~ 10

Fig. 11

Points of Integration

